



SiRON D017-1 Highlight Signal Tower Light



[View Details](#)

Introduction

Features:

- * Exquisite and beautiful structure, unique and innovative appearance.
- * Fully functional and cost-effective.
- * High light LED patch.
- * High brightness, large Angle, low thermal resistance.
- * The overall structure design has good heat dissipation.
- * The high quality drive plate guarantees the overall life of the lamp.

Classification

Industrial Lighting->Multifunctional LED Signal Lamp

Attributes

- Brand: SiRON
- Model: D017-1
- prodCode: 9405499000



Product Description

About selection

Type analysis		
①	LED signal lamp series	D017-1
②	Working condition	B:Always on with beeping Q:Shining with beeping
③	Installation mode	Blank:Bent type 1:Upright type 2:L bracket
④	Rod length	Blank:50mm rod L1:110mm rod L2:215mm rod L3:240mm rod
⑤	Case color	Blank:white H:Black

Note:The 50mm bent rod length is a regular standard product.Others are custom-made products.If you need customization,please contact our sales department.
The L bracket can only be selected with a rod length of 240mm

Specifications

Model number	D017-1B		
Appearance			
input voltage/ input current	Input voltage:DC 24V Input current:Monochrome 30-70mA Buzzer 15mA		
The material	PC lamp shade +ABS lamp shell		
Power	1.2W ~ 2W		
Light source/Luminous angle	Light source:Surface mount 2835 LED Irritation angle:360°		
Sound intensity/Class of protection	sound intensity:>90dB IP Grade:IP54		
Color layer	Three layers and three colors		
Working condition	Always on with beeping/Shining with beeping		
Installation mode	Bend type	Up-straight type	L bracket
Number of flashes	60-70/min		
Service life/Standard wiring length	service life:50000hWiring length:500mm		
Connection mode	NPN/PNP common		
Ambient temperature/storage temperature	-20~45°C/-40~70°C		
Ambient humidity/Storage humidity	10~90%		
Luminescent lamp source color	Red Yellow Green 		

Wear-resistant **Impact-resistant**

Adoption of bending type base, solid and reliable installation



High brightness light source bright and clear
Lighting color:red yellow green

Loud, high-decibel warning

Always on with buzzer/flashing with buzzer



Loud,high-decibel warning
Always on with buzzer/flashing with h buzzer

Wear-resistant **Impact-resistant**

Adoption of bending type base, solid and reliable installation



Wear-resistant Impact-resistance Adoption o
f bending type base, solid and reliable installa
tion 180 rotate without obstacles

High brightness light source bright and clear

Lighting Color:



Constant current drive power supply
A part of independent installation
Import LED color light source luminous equilib
rium


PRODUCT DETAILS



External drawing


Unit: mm

Bent type

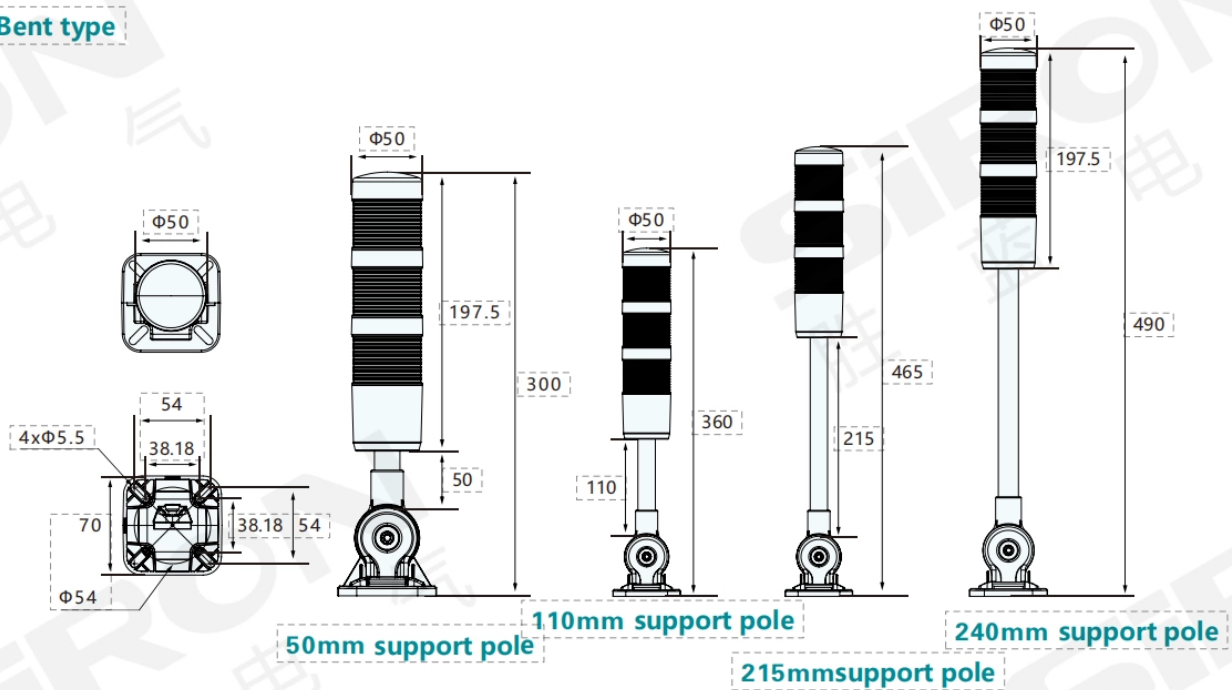


Unit: mm

Upstraight type


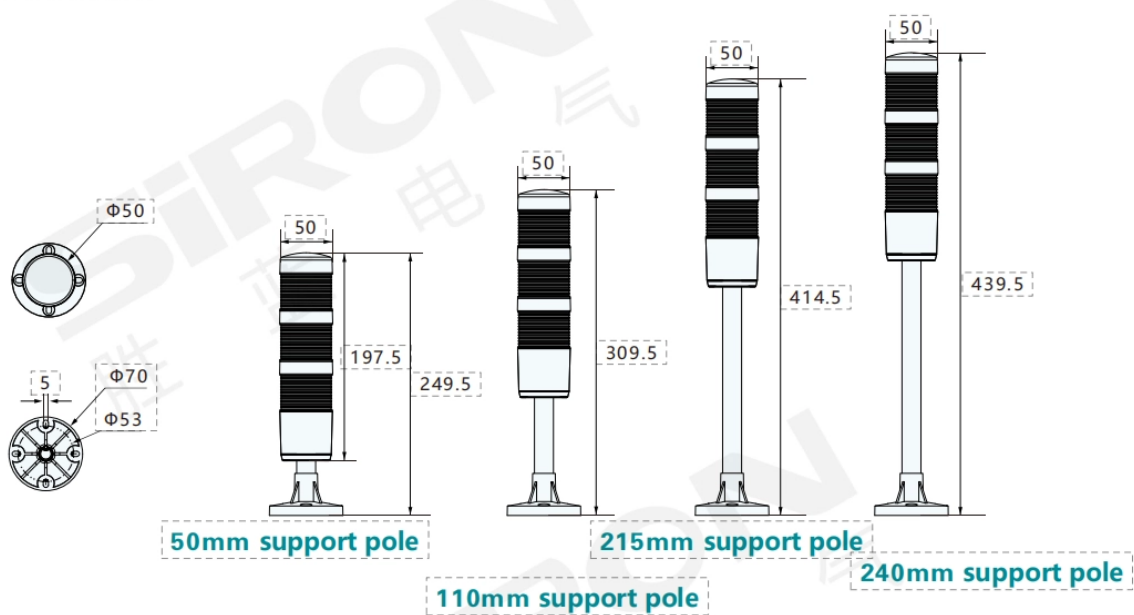


Unit: mm

L Bracket

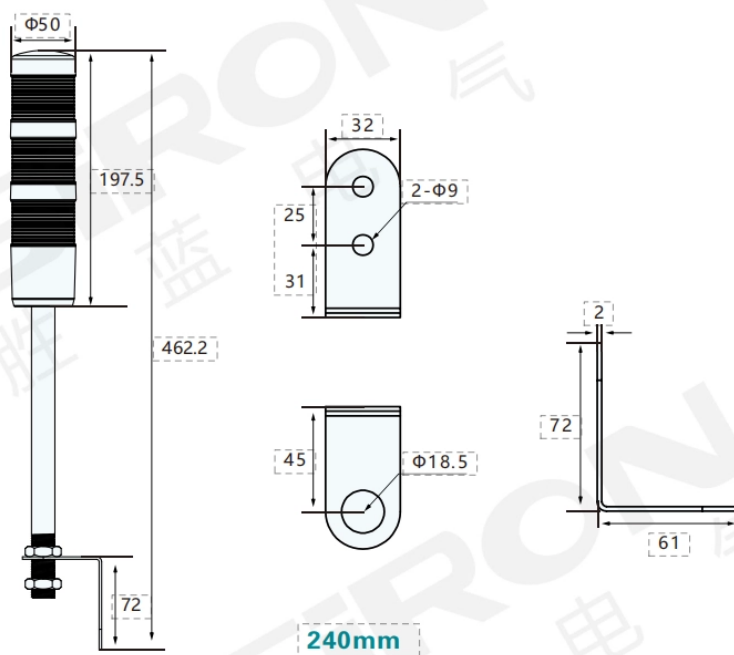

Wiring diagram

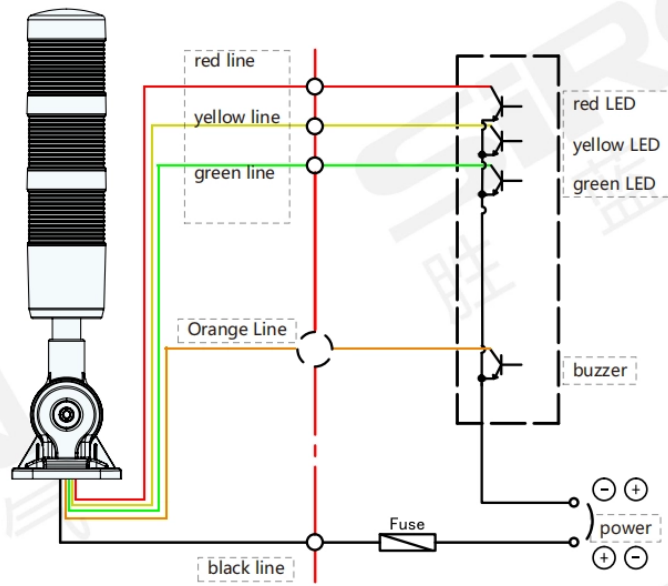

24V DC common positive and negative universal (NPN/PNP)